

## MOS FET Relays

G3VM-354J/J1

### Analog-switching MOS FET Relay with DPST-NC (Double-pole, Single-throw, Normally Closed) Contacts General-purpose Series Added

- New models in 350-V load voltage series with DPST-NC contacts and an 8-pin SOP package.
- Continuous load current of 120 mA (90 mA).
- Dielectric strength of 1,500 Vrms between I/O.
- General-purpose series (high ON-resistance) added.



**NEW**

#### ⚠ Caution

Refer to "Common Precautions" on page 2.

**Note:** The actual product is marked differently from the image shown here.

### ■ Application Examples

- Broadband systems
- Measurement devices
- Data loggers
- Amusement machines


### ■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Minimum packaging unit	
				Number per stick	Number per tape
DPST-NC	Surface-mounting terminals	350 V AC	G3VM-354J	50	---
			G3VM-354J1		
			G3VM-354J(TR)	---	2,500
			G3VM-354J1(TR)		


### ■ Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

G3VM-354J/J1




**Note:** The actual product is marked differently from the image shown here.

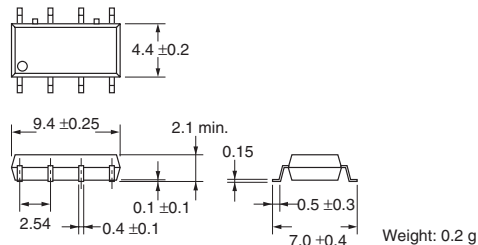


### ■ Terminal Arrangement/Internal Connections (Top View)

G3VM-354J/J1



### ■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-354J/J1



■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rating	Unit	Measurement Conditions	
Input	LED forward current	$I_F$	50	mA	
	Repetitive peak LED forward current	$I_{FP}$	1	A	100 $\mu$ s pulses, 100 pps
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.5	mA/°C	Ta $\geq$ 25°C
	LED reverse voltage	$V_R$	5	V	
	Connection temperature	$T_J$	125	°C	
Output	Output dielectric strength	$V_{OFF}$	350	V	
	Continuous load current	$I_O$	120 (90)	mA	
	ON current reduction rate	$\Delta I_{ON}/^\circ\text{C}$	-1.2 (-0.9)	mA/°C	Ta $\geq$ 25°C
	Connection temperature	$T_J$	125	°C	
Dielectric strength between input and output (See note 1.)		$V_{I,O}$	1,500	Vrms	AC for 1 min
Operating temperature		$T_a$	-40 to 85	°C	With no icing or condensation
Storage temperature		$T_{stg}$	-55 to 125	°C	With no icing or condensation
Soldering temperature (10 s)		---	260	°C	10 s


Note 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Values inside parentheses ( ) are for G3VM-354J1.

■ Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	$V_F$	1.0	1.15	1.3	V	$I_F = 10$ mA
	Reverse current	$I_R$	---	---	10	$\mu$ A	$V_R = 5$ V
	Capacity between terminals	$C_T$	---	30	---	pF	V = 0, f = 1 MHz
	Trigger LED forward current	$I_{FC}$	---	1	3	mA	$I_{OFF} = 10$ $\mu$ A
Output	Maximum resistance with output ON	$R_{ON}$	---	15 (30)	25 (50)	$\Omega$	$I_O = 120$ mA
	Current leakage when the relay is open	$I_{LEAK}$	---	---	1.0	$\mu$ A	$V_{OFF} = 350$ V, $I_F = 5$ mA
Capacity between I/O terminals		$C_{I,O}$	---	0.8	---	pF	f = 1 MHz, $V_s = 0$ V
Insulation resistance		$R_{I,O}$	1,000	---	---	M $\Omega$	$V_{I,O} = 500$ V DC, $R_{OH} \leq 60\%$
Turn-ON time		tON	---	(0.25)	1.0 (0.5)	ms	$I_F = 5$ mA, $R_L = 200$ $\Omega$ , $V_{DD} = 20$ V (See note 2.)
Turn-OFF time		tOFF	---	(0.5)	3.0 (1)	ms	

Note 2. Turn-ON and Turn-OFF Times



Values inside parentheses ( ) are for G3VM-354J1.

■ Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	$V_{DD}$	---	---	280	V
Operating LED forward current	$I_F$	5	---	25	mA
Continuous load current	$I_O$	---	---	120 (90)	mA
Operating temperature	$T_a$	-20	---	65	°C

Values inside parentheses ( ) are for G3VM-354J1.

■ Engineering Data

Load Current vs. Ambient Temperature  
G3VM-354J/J1

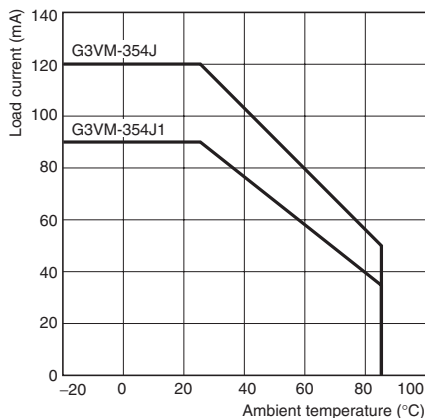

■ Safety Precautions

Refer to page 2 for precautions common to all G3VM models.