

# MICRO SWITCH ESS SERIES



## **FEATURES**

- Small compact size suitable for electric equipment appliances and P.C.B. layout
- 2-piece spring mechanism design offering durable acute operation and long life
- Heavy/Light operation force specifications
- Three Kinds of terminal available soldering, printing and quick connect type
- RoHS Compliant

## APPLICATIONS

- Communication equipment
- Vending machines
- Security systems
- Medical equipment
- Office automation appliances
- Home electric appliances
- Automotive

#### **■ SPECIFICATIONS**

#### 1. ELECTRICAL

TYPE DESCRIPTION		ESS-01	ESS-05	ESS-10
Contact Rating:	AC 125V	0.1A	5A	
	AC 250V		3A	10.1A
	DC 30V	0.1A		
Contact	O.F.1.47N (150gf)	50mΩ Max.	50mΩ Max.	50mΩ Max.
Resistance:	O.F.0.49N (50gf)	100mΩ Max.	50mΩ Max.	
(Initial)	O.F.0.25N (25gf)	150mΩ Max.		
Insulation Resistance		100 MΩ Min. at 500 VDC		




# 2. CHARACTERISTICS

			Ι		
TYPE DESCRIPTION		ESS-01	ESS-05	ESS-10	
Mechanical Life (Cycles Operations)		30,000,000 (60 operations / min)	30,000,000 (60 operations / min)	10,000,000 (60 operations / min)	
Electrical Life (Cycles Operations)		200,000 (20 operations / min)	50,000 (20 operations / min)	10,000 (20 operations / min)	
Ambient Temperature		-25°C to +85°C (without dew condensation)			
Ambient Humidity		Max. 85% RH			
Max.	Mechanical	400 cycle/min.			
operating cycle rate	Electrical	30 cycle/min.			
Allowable Operation speed		0.1 mm to 1 m/sec (without lever)			
	Between non-continuous terminal	600 VAC for 1 min	1000 VAC for 1 min	1000 VAC for 1 min	
Dielectric Strength	Between each terminal and other exposed metal parts	1500 VAC for 1 min			
	Between each terminal and ground	1500 VAC for 1 min			
Vibration Resistance	Malfunction	10 to 55 Hz at single amplitude of 0.75mm			
Unit weight		Approx 1.6g (pin plunger models)			



# ■ PART NUMBERING SYSTEM

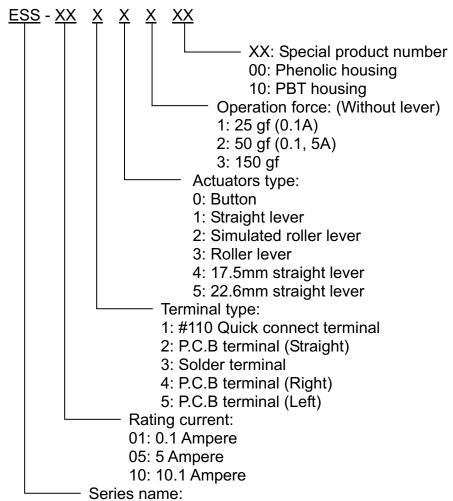

ESS: Small compact size micro switch

Actuators type			
0	Button (without lever)		
1	Straight lever		
2	Simulated roller lever		
3	Roller lever	@ @	

Terminal type				
1	#110 Quick connect terminal			
2	P.C.B terminal (Straight)			
3	Solder terminal			
4	P.C.B terminal (Right)			
5	P.C.B terminal (Left)			



# **SELECTION GUIDE**

	Actuator	O.F. Max. gf	#110 Quick connect terminal	P.C.B terminal (Straight)	Solder terminal
	BUTTON	25gf (0.25N)	ESS01101	ESS01201	ESS01301
		50gf (0.49N)	ESS01102	ESS01202	ESS01302
		150gf (1.47N)	ESS01103	ESS01203	ESS01303
	Straight lever	8gf (0.08N)	ESS01111	ESS01211	ESS01311
		16gf (0.16N)	ESS01112	ESS01212	ESS01312
0.1A		50gf (0.49N)	ESS01113	ESS01213	ESS01313
U. IA	0: 1.1	8gf (0.08N)	ESS01121	ESS01221	ESS01321
	Simulated roller lever	16gf (0.16N)	ESS01122	ESS01222	ESS01322
		50gf (0.49N)	ESS01123	ESS01223	ESS01323
		8gf (0.08N)	ESS01131	ESS01231	ESS01331
	Roller lever	16gf (0.16N)	ESS01132	ESS01232	ESS01332
		50gf (0.49N)	ESS01133	ESS01233	ESS01333
	BUTTON	50gf (0.49N)	ESS05102	ESS05202	ESS05302
		150gf (1.47N)	ESS05103	ESS05203	ESS05303
5A	Straight lever	16gf (0.16N)	ESS05112	ESS05212	ESS05312
		50gf (0.49N)	ESS05113	ESS05213	ESS05313
JA.	Simulated roller lever	16gf (0.16N)	ESS05122	ESS05222	ESS05322
		50gf (0.49N)	ESS05123	ESS05223	ESS05323
	Roller lever	16gf (0.16N)	ESS05132	ESS05232	ESS05332
		50gf (0.49N)	ESS05133	ESS05233	ESS05333
10.1A	BUTTON	150gf (1.47N)	ESS10103	ESS10203	ESS10303
	Straight lever	50gf (0.49N)	ESS10113	ESS10213	ESS10313
	Simulated roller lever	50gf (0.49N)	ESS10123	ESS10223	ESS10323
	Roller lever	50gf (0.49N)	ESS10133	ESS10233	ESS10333












# **■ CIRCUIT DIMENSIONS**

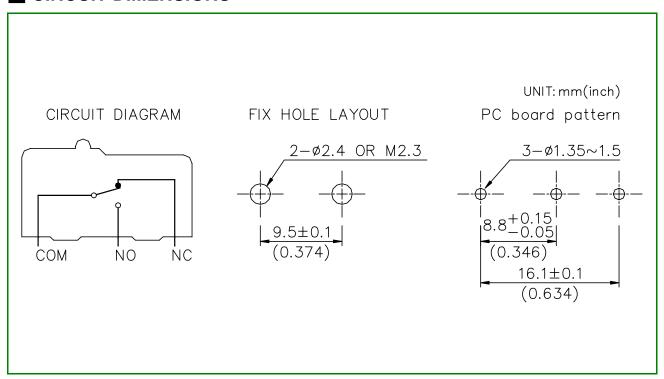

## DIMENSIONS

