



Rocker Switch MRA Series



SPECIFICATION

- Electrical Rating : 3A 250VAC(UL,VDE)
- Mechanical life: Over 30000 cycles
- Electrical life: Over 10000 cycles
- Contact resistance: <math><20m\Omega</math>
- Insulation resistance: >1000M $\Omega$
- High voltage resistance: >1500V 1 min.
- Ambient temperature: Terminal side -20 to +85 $^{\circ}$ C  
Actuating side -20 to +55 $^{\circ}$ C
- Storage temperature: -30 to +80 $^{\circ}$ C Max
- Atmospheric humidity: Max.85%
- Actuating force: 4 to 8N(depends on different switch function)
- Flammability: UL94 V-2
- Temperature rise at the terminal: Max 30 $^{\circ}$ C (UL1054)
- Solder ability of terminal: Max 350 $^{\circ}$ C, 3s

MATERIALS

- Housing: PA66
- Rocker: PA66
- Contacts: Silver alloy
- Terminal: Brass silver plated
- Spring: SWC
- Movable arm: Brass silver plated

HOW TO ORDER

MRA

Series

Series

1

Switch Function

1	ON-OFF
2	ON-ON

K

Housing Color

G	Gray
W	White
K	Black

K

Actuator Color

G	Gray
W	White
K	Black
O	Orange
R	Red
B	Blue

E

Marking

Please see option of Marking

T

Terminal Type

T connect tab 3.7(Wide)\*0.4(Thick)

C


Safety Approval

C	3 Safety Approvals
E	None Approvals


Option of switch function

Item NO	POLES & THROWS	Rocker position		
		Left	Center	Right
MRA1	SPST	ON	None	OFF
MRA2	SPDT	ON	None	ON

Dimension

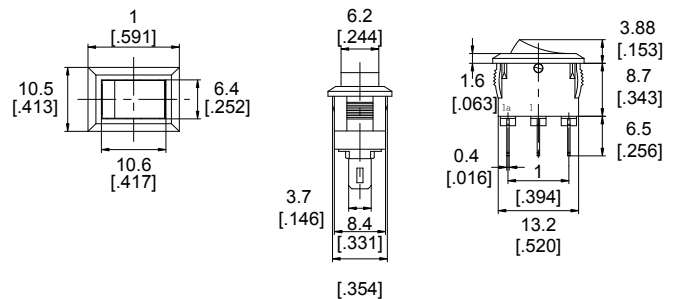

Panel cut out



Z	Y	X
0.70~1.25	9.10~9.20	14.10~14.20
1.25~2.00	9.10~9.20	14.20~14.30
2.00~3.00	9.10~9.20	14.30~14.40