



单刀波动开关

Single-pole Rocker Switch

RS-1 Series

单刀带灯波动开关

Single-pole Illuminated Rocker Switch


IRS-1 Series



RoHS

型号说明 Ordering Information

IRS-101-1A3D-R/B

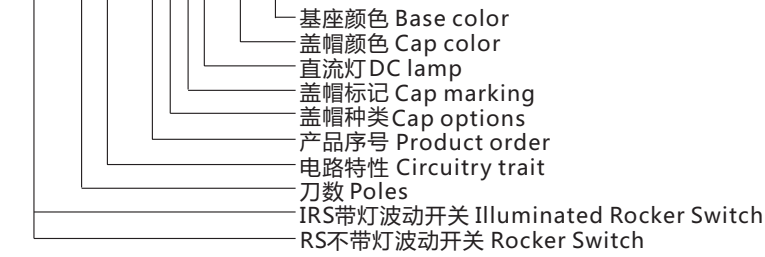

技术特性 Specification

- 1.规格 Rating:20A 125VAC;15A 250VAC;35A 12VDC
- 2.接触电阻 Contact Resistance:35mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1500VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:10,000 Cycles

电路特性Circuitry trait


01	ON	-	OFF
02	ON	-	ON
11	(ON)	-	OFF
03	ON	OFF	ON
13	ON	OFF	(ON)
23	(ON)	OFF	(ON)

( ) : 回弹指示 Indicates Momentary


盖帽颜色Cap color 基座颜色Base color 盖帽种类Cap options

黑 Black (B)
白 White (W)
红 Red (R)
黄 Yellow (Y)
绿 Green (G)
蓝 Blue (BL)
桔黄 Orange (O)
灰 Gray (GR)


黑 Black (B)
白 White (W)
灰 Gray (GR)

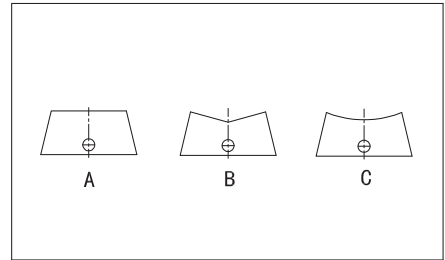

盖帽标记 Cap marking


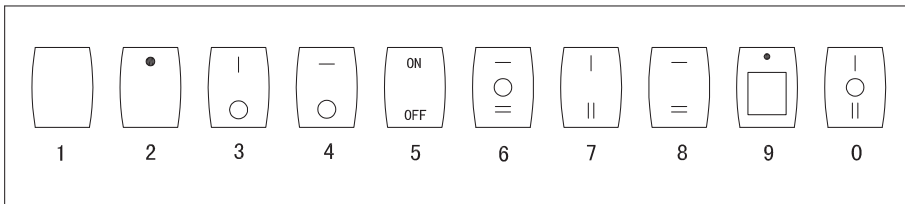


防水罩 Water proof cap

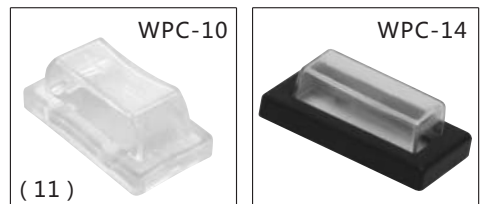



RS-101-1A ON-OFF

SPST 2P

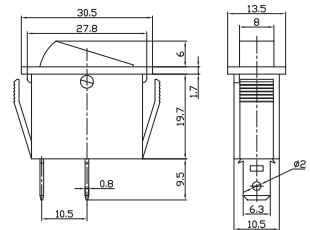

RS-101-1B ON-OFF



SPST 2P

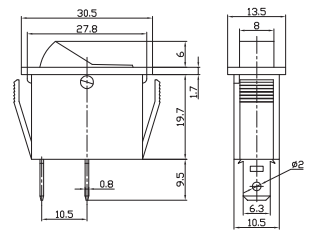

RS-101-1C ON-OFF

RS-111-1C (ON)-OFF

SPST 2P

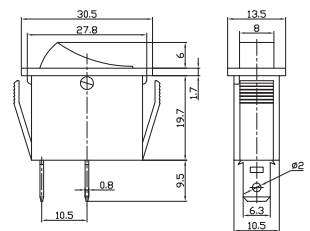



单刀波动开关

Single-pole Rocker Switch

RS-1 Series

单刀带灯波动开关

Single-pole Illuminated Rocker Switch

IRS-1 Series

	<p><b>IRS-101-1A</b> ON-OFF SPST 3P</p> <p><b>RS-102-1A</b> ON-ON SPDT 3P</p>			
	<p><b>IRS-101-1B</b> ON-OFF SPST 3P</p> <p><b>RS-102-1B</b> ON-ON SPDT 3P</p>			
	<p><b>IRS-101-1C</b> ON-OFF SPST 3P</p> <p><b>RS-102-1C</b> ON-ON SPDT 3P</p>			
	<p><b>RS-101-2A</b> ON-OFF SPST 2P</p>			
	<p><b>RS-101-2B</b> ON-OFF SPST 2P</p>			
	<p><b>RS-101-2C</b> ON-OFF SPST 2P</p>			
	<p><b>IRS-101-2A</b> ON-OFF SPST 3P</p> <p><b>RS-102-2A</b> ON-ON SPDT 3P</p>			



单刀波动开关





























Single-pole Rocker Switch

RS-1 Series

单刀带灯波动开关

Single-pole Illuminated Rocker Switch

IRS-1 Series

	<p><b>IRS-101-2B</b> ON-OFF SPST 3P</p> <p><b>RS-102-2B</b> ON-ON SPDT 3P</p>			
	<p><b>IRS-101-2C</b> ON-OFF SPST 3P</p> <p><b>RS-102-2C</b> ON-ON SPDT 3P</p>			
	<p><b>RS-101-3A</b> ON-OFF SPST 2P</p>			
	<p><b>RS-101-3B</b> ON-OFF SPST 2P</p>			
	<p><b>RS-101-3C</b> ON-OFF SPST 2P</p>			
	<p><b>IRS-101-3A</b> ON-OFF SPST 3P</p> <p><b>RS-102-3A</b> ON-ON</p> <p><b>RS-103-3A</b> ON-OFF-ON SPDT 3P</p>			
	<p><b>IRS-101-3B</b> ON-OFF SPST 3P</p> <p><b>RS-102-3B</b> ON-ON</p> <p><b>RS-103-3B</b> ON-OFF-ON SPDT 3P</p>			



单刀波动开关


Single-pole Rocker Switch

RS-1 Series

单刀带灯波动开关

Single-pole Illuminated Rocker Switch

IRS-1 Series

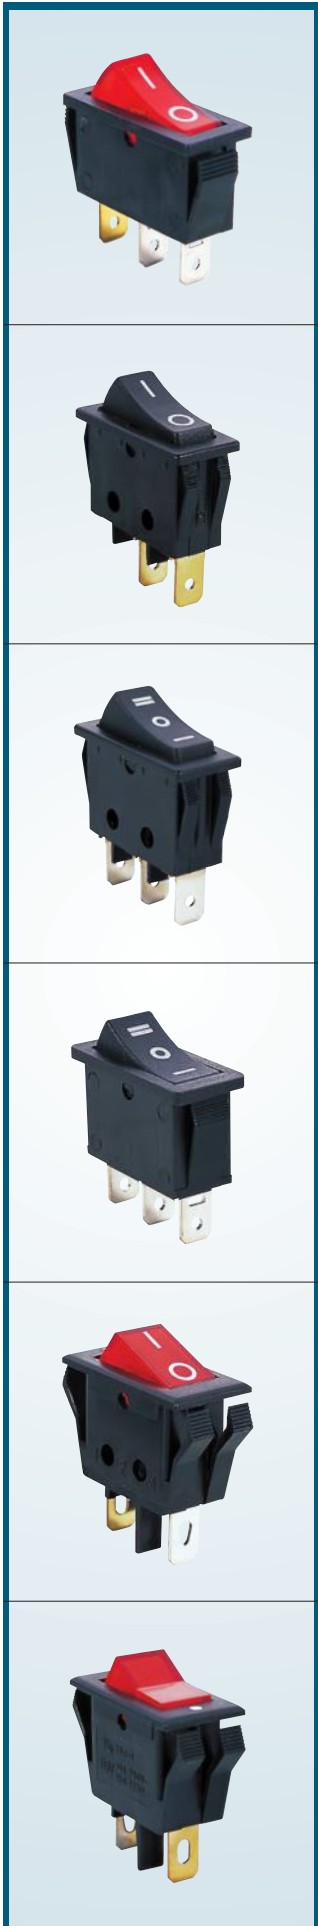



**IRS-101-3C** ON-OFF

SPST 3P

**RS-102-3C** ON-ON


**RS-103-3C** ON-OFF-ON

SPDT 3P

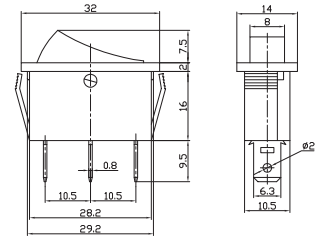

**RS-101-11C** ON-OFF

SPST 2P



**IRS-101-11C** ON-OFF



SPST 3P

**RS-102-11C** ON-ON

**RS-103-11C** ON-OFF-ON

**RS-123-11C** (ON)-OFF-(ON)

SPDT 3P





**RS-101-16C** ON-OFF

SPST 2P

**RS-102-16C** ON-ON

**RS-103-16C** ON-OFF-ON

SPDT 3P



**RS-1-101-2A** ON-OFF

SPST 2P



**IRS-1-2A** ON-OFF

SPST 3P

**RS-1-102-2A** ON-ON

SPDT 3P

15A 125VAC; 10A 250VAC



**RS-1-101-2B** ON-OFF

SPST 2P


**IRS-1-2B** ON-OFF

SPST 3P

**RS-1-102-2B** ON-ON

SPDT 3P

15A 125VAC; 10A 250VAC

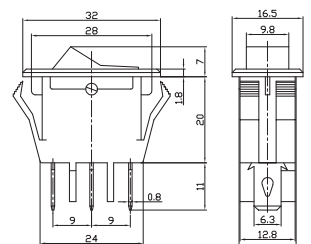



单刀波动开关

Single-pole Rocker Switch

RS-1 Series



单刀带灯波动开关

Single-pole Illuminated Rocker Switch



IRS-1 Series





**RS-1-101-2C** ON-OFF  
SPST 2P  
**IRS-1-2C** ON-OFF  
SPST 3P  
**RS-1-102-2C** ON-ON  
SPDT 3P  
15A 125VAC; 10A 250VAC

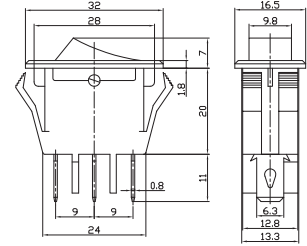



**IRS-1-3B** ON-OFF  
15A 125VAC; 10A 250VAC  
SPST 3P

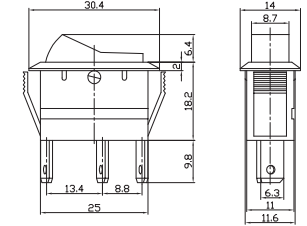



**IRS-1-4C** ON-OFF  
15A 125VAC; 10A 250VAC  
SPST 3P  
L=7 ; 10

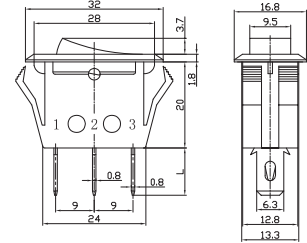



**IRS-1-6C** ON-OFF  
15A 125VAC; 10A 250VAC  
SPST 3P

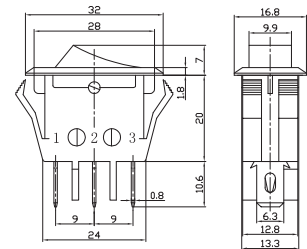

**IRS-1-7A** ON-OFF  
15A 125VAC; 10A 250VAC  
SPST 3P  
L=7 ; 10

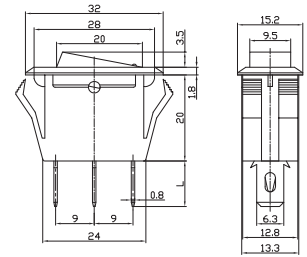

**IRS-101E-1C** ON-OFF  
20A 125VAC; 15A 250VAC  
SPST 3P





单刀波动开关

Single-pole Rocker Switch

RS-1 Series



单刀带灯波动开关

Single-pole Illuminated Rocker Switch



IRS-1 Series



**IRS-1E-2C** ON-OFF  
15A 125VAC; 10A 250VAC  
SPST 3P

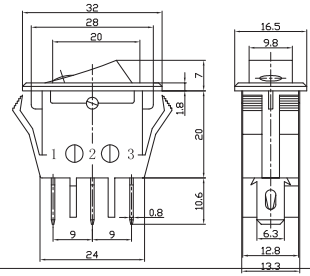

**IRS-101E-3A** ON-OFF  
15A 125VAC; 10A 250VAC  
SPST 3P

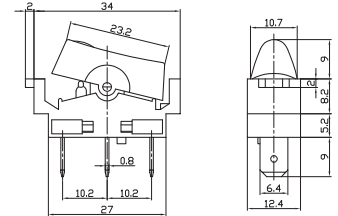



过载保护开关 Circuit-breaker Switch





IRS-R Series  
IRS-B Series





**IRS-1-R15** 15A 125VAC/250VAC  
**IRS-1-R10** 10A 125VAC/250VAC  
**IRS-1-R7** 7A 125VAC/250VAC  
ON-OFF SPST 3P  
(Rocker Switch Breaker)

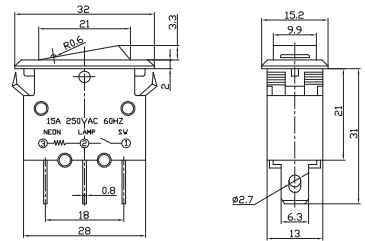

**IRS-1-B15** 15A 125VAC/250VAC  
**IRS-1-B10** 10A 125VAC/250VAC  
**IRS-1-B7** 7A 125VAC/250VAC  
ON-OFF SPST 3P  
(Push-button Switch Breaker)

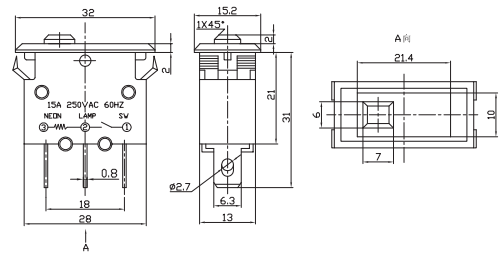

**IRS-2-R15** 15A 125VAC/250VAC  
**IRS-2-R10** 10A 125VAC/250VAC  
**IRS-2-R7** 7A 125VAC/250VAC  
ON-OFF DPST 4P  
(Double poles Rocker Switch Breaker)

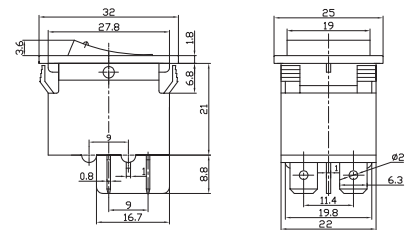

**IRS-2-R15ST** 15A 125VAC/250VAC  
**IRS-2-R10ST** 10A 125VAC/250VAC  
**IRS-2-R7ST** 7A 125VAC/250VAC  
ON-OFF DPST 4P  
(Double Poles Rocker Switch Breaker)

