

Abundance Enterprise Co. PRODUCT SPECIFICATION

CERAMIC RESONATOR

AEC PART NUMBER / SPEC. NO: ZTTCP3.58MG

CUSTOMER: Schukat electronic Vertriebs GmbH





Peak soldering temperature 260°C/10 sec Ceramic component is exempted (According to ROHS directive 2005/95/EC ANNEX point 7)

Customer's Name	Schukat electronic Vertriebs GmbH	
Production Name	Ceramic Resonator	
Frequency	3.58MHz	
Model No	ZTTCP3.58MG	
Issue Date	15 th Oct, 2013	

Address: Room 602-603, Java Commercial Centre,

128 Java Road,

North Point, Hong Kong

Homepage: http://www.aeccrystal.com/

Email: sales@aeccrystal.com

Telephone: (852)-28560000 Fax (852) 2561 2161

Prepared	Inspection	Approved	
Nathan	Andy	Henkie	

Product Specification	Original Date	31/07/2013
1 Toduct Specification	PN:	ZTTCP

1. SCOPE


This specification shall cover the characteristics of the ceramic resonator with the type ZTTCP3.58MG

2. PART NO.:

PART NUMBER	CUSTOMER PART NO	SPECIFICATION NO
ZTTCP3.58MG		

3. OUTLINE DRAWING AND DIMENSIONS:

- 3.1 Appearance: No visible damage and dirt.
- 3.2 Dimensions:

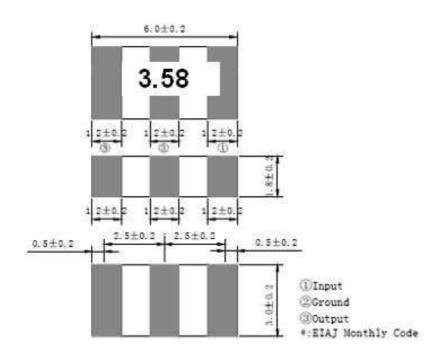

Unit: mm

Product Specification	Original Date	31/07/2013
1 Todact Specification	PN:	ZTTCP


4. ELECTRICAL SPECIFICATIONS:

	Item	Requirements	
4.1	Oscillation Frequency Fosc (MHz)	3.58	
	Frequency Accuracy (%)	±0.5	
4.2	Resonant Impedance Ro	40	
	(Ω)max		
4.3	Temperature Coefficient of	±0.3 (Oscillation	
	Oscillation Frequency (%) max	Frequency drift -20℃ to	
		+85℃)	
4.4	Withstanding Voltage	100 VDC, 5 sec	
4.5	Rating Voltage U _R (V)		
	(1) D.C. Voltage	6 VDC.	
	(2) A.C. Voltage	15 Vp-p.	
4.6	Insulation Resistance Ri($M\Omega$) min	500 (10V, 1min)	
4.7	Operating Temperature (℃)	-20∼ +85	
4.8	Storage Temperature (°C)	-55∼ +85	
4.9	Aging Rate (%) max	±0.1 From initial value	

Components shall be left in a chamber of +85±2°C for 1000 hours, then measured after leaving in natural condition for 1 hours.

4. MEASUREMENT:

- 4.1 Measurement Conditions: Parts shall be measured under a condition (Temp.: 20±15℃, Humidity: 65±20% R.H.) unless the standard condition (Temp.: 25±3 ℃, Humidity: 65±5% R.H.) is regulated to measure.
- 4.2 Test Circuit:

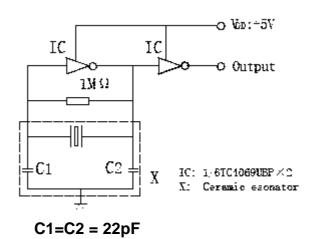

roduct Specification	Original Date	31/07/2013
Toduct Specification	PN:	ZTTCP

5. PHYSICAL AND ENVIRONMENTAL CHARACTERISTICS

No	Item	Condition of Test		Performance
				Requirements
6.1	Humidity	Keep the resonator at 40±2℃ and		It shall fulfill the
		90-95% RH for 96±4 hours. The		specifications in
		the resonator into the room Co		Table 1.
		for 1 hour prior to the Measure		
6.2	Vibration	Subject the resonator to vibra		It shall fulfill the
		hours each in x \ y and z axis		specifications in
		amplitude of 1.5mm, the frequence	ency shall	Table 1.
		be varied uniformly between the	he limits of	
		10 Hz—55Hz.		
6.3	Mechanical	Drop the resonator randomly of	onto a	It shall fulfill the
	Shock	wooden floor from the height of	of 100cm 3	specifications in
		times.		Table 1.
6.4	Soldering	Passed through the re-flow ov	en under	It shall fulfill the
	Test	the following condition and lef	ft at room	specifications in
		temperature for 1 hour before		Table 1.
		measurement.		
		Temperature at the surface of	Time	
		the substrate		
		Preheat 150±5℃	60±10	
			sec	
		Peak 260±5°C	10±3 sec	
6.5	Solder	Dipped in 250±5℃ solder bath	for 3±0.5	The terminals shall
	Ability	sec seconds with rosin flux (2	5wt%	be at least 95%
		ethanol solution.)		covered by solder.
6.6	High	Subject the resonator to 80±5°	C for 96	It shall fulfill the
	Temperature	hours, then release the resona	ator into	specifications in
	Exposure	the room conditions for 1 hou	r prior to	Table 1.
		the measurement.		
6.7	Low	Subject the resonator to -20±5℃ for 96		It shall fulfill the
	Temperature	hours, then release the resonator into		specifications in
	Exposure	the room conditions for 1 hour prior to		Table 1.
		the measurement.		

Product Specification	Original Date 31/07/2013	
1 Todact Specification	PN:	ZTTCP

No	Item	Condition of Test	Performance
			Requirements
6.8	Temperature	Subject the resonator to -40℃ for 30	It shall fulfill the
	Cycling	min. followed by a high temperature of	specifications in
		85℃ for 30 min.	Table 1.
		Cycling shall be repeated 5 times with a	
		transfer time of 15 sec. At the room	
		temperature for 1 hour prior to the	
		measurement.	
6.9	Board	Mount a glass-epoxy board	Mechanical
	Bending	(Width=40mm,thickness=1.6mm),then	damage such as
		bend it to 1mm displacement and keep it	breaks shall not
		for 5 seconds. (See the following figure)	occur.
		PRESS	
		- 20 -	
		PRESS HEAD	
		D.U.T. 01	
		10,0	
		45±2 45±2	
		<u>∕ø5 SUPPORT</u> BAR	

TABLE 1

Item	Specification
Oscillation Frequency	
Change	±0.3
∴Fosc/Fosc (%) max	
Resonant Impedance	45
Ro(Ω)max	45

Note: The limits in the above table are referenced to the initial measurements.

6. REVIEW OF SPECIFICATIONS


When something gets doubtful with this specifications, we shall jointly work to get an agreement.

Product Specification	Original Date	31/07/2013
1 Toutet Specification	PN:	ZTTCP


7. RECOMMENDED LAND PATTERN AND REFLOW SOLDERING

STANDARD CONDITIONS

8.1Recommended land pattern

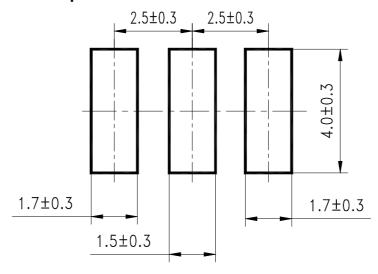

8.2 Recommended reflow soldering standard conditions

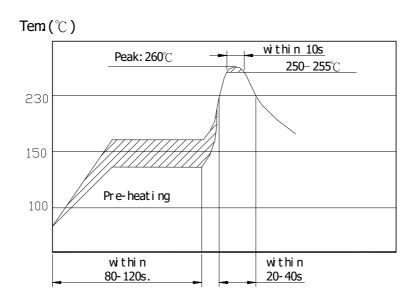

Product Specification	Original Date	31/07/2013
	PN:	ZTTCP


8. PACKAGE

To protect the products in storage and transportation, it is necessary to pack them (outer and inner package). On paper pack, the following requirements are requested.

8.1 Dimensions and Mark

At the end of package, the warning (moisture proof, upward put) should be stick to it.

Dimensions and Mark (see below)

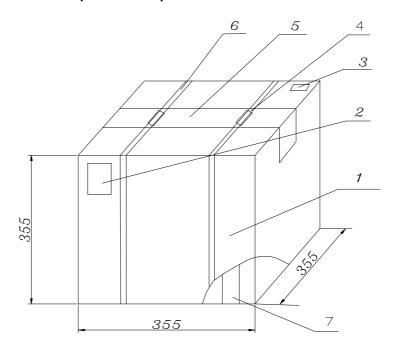

NO.	Name	Quantity	Notes
1	Package	1	
2	Certificate of approval	1	
3	Label	1	
4	Tying	2	
5	Adhesive tape	1.2m	
6	Belt	2.9m	
7	Inner Box	10	

8.2 Section of package

Package is made of corrugated paper with thickness of 0.8cm. Package has 10 inner boxes, each box has 1 reel (each reel for plastic bag).

Product Specification	Original Date	31/07/2013
1 Todact Specification	PN:	ZTTCP

8.3 Quantity of package


Per plastic reel 4000 pieces of piezoelectric ceramic part

Per inner box 1 reel

Per package 10 inner boxes(40000 pieces of piezoelectric

ceramic part)

8.4 Inner Packing Dimensions

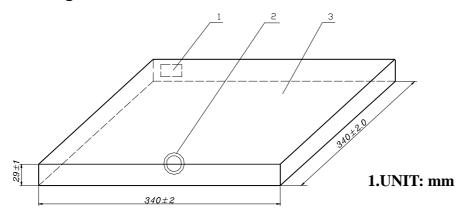


1	Label
2	QC Label
3	Inner Box


Pars shall be packaged in box with hold down tape upside. Part No., quantity and lot No.

Product Specification	Original Date	31/07/2013
1 Todact Specification	PN:	ZTTCP

8.5 Reel

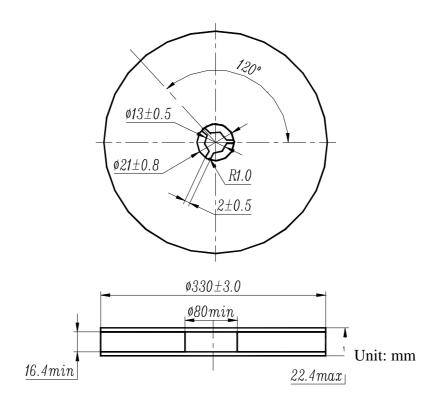

8.6 Packing Method Sketch Map

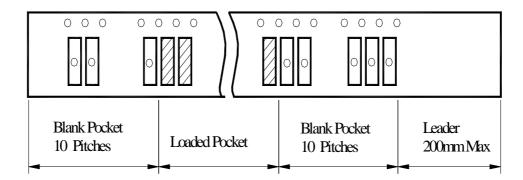

8.7 Test Condition Of Peeling Strength

