

Product Specification	Abundance Enterprise Co.	Original Date	13/7/2007
		PN:	SR433.92-75-F11



Abundance Enterprise Co.
PRODUCT SPECIFICATION

SAW RESONATOR

AEC PART NUMBER / SPEC. NO: SR433.92-75-F11
CUSTOMER: Schukat electronic Vertriebs GmbH



This model is ROHS/PB-free compliance according to the ROHS directive 2002/95/EC

Customer's Name	Schukat electronic Vertriebs GmbH
Production Name	SAW RESONATOR
Frequency	433.92MHz
Model No	F11
Issue Date	15 th Oct, 2013

Address: Room 602-603, Java Commercial Centre,
128 Java Road,
North Point, Hong Kong
Homepage: <http://www.aeccrystal.com/>
Email: sales@aeccrystal.com
Telephone: (852)-2856 0000
Fax (852) 2561 2161


Prepared	Inspection	Approved
<i>Nathan</i>	<i>Andy</i>	<i>Henkie</i>

Product Specification	Abundance Enterprise Co.	Original Date	13/7/2007
		PN:	SR433.92-75-F11


1. GENERAL PROVISION

- 1-1 Production Name: Pin SAW Resonator
- 1-2 Holder Type: SR433.92- F11
- 1-3 This specification relates to the SAW resonator to be supplied by Abundance Enterprise Co. (AEC).

2. DIMENSION & LAND PATTERN

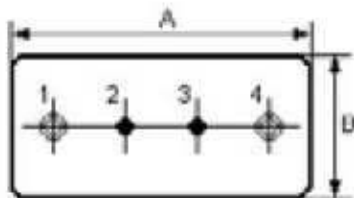


Pin	Configuration
1/4	Input / Output
2/3	Case Ground

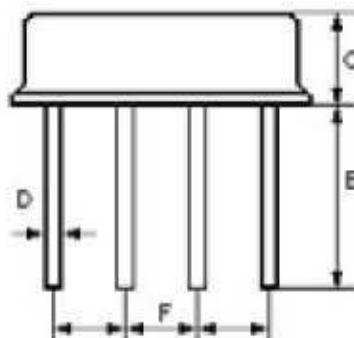


Dimension	Data (unit: mm)
A	11.0 ±0.20
B	4.5 ±0.20
C	3.2 ±0.20
D	0.45 ±0.20
E	5.0 ±0.10
F	2.54 ± 0.2

AEC Abundance Enterprise Co.	NO.	Revised DATE	MODIFY CONTENTS	
	1	2006.8.25	NEW UPDATE	
DIMENTION	mm			
SCALE		MODEL	SR433.92-TO39	
TOLERANCE	±0.2	PART NAME	PRODUCT DIMEMTION	
DRAWING NO.		APPV'D BY	CHECK BY	DRAWN BY
433.92-SR		Henkie	Andy	Nathan

3. EQUIVALENT LC MODEL AND TEST CIRCUIT

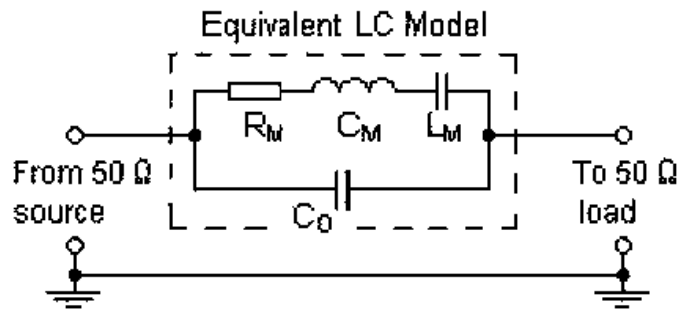

4. FREQUENCY RESPONSE

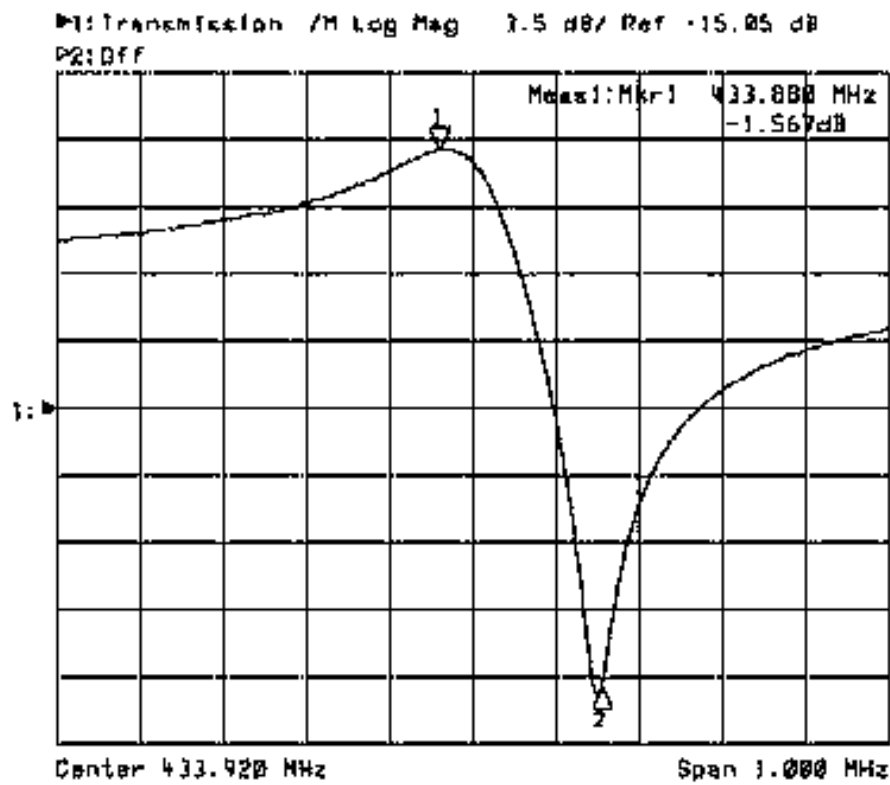

Product Specification	Abundance Enterprise Co.	Original Date	13/7/2007
		PN:	SR433.92-75-F11

5. ELECTRICAL SPECIFICATION

The following are our reliability test condition and criteria.

5-1. Maximum Rating


Rating		Value	Unit
CW RF Power Dissipation	P	+10	dBm
DC Voltage Between Any Two Pins	V _{DC}	±30	V
Storage Temperature Range	T _{stg}	-40 to +85	°C
Operating Temperature Range	T _A	-10 to +60	°C

5-2. Electronic Characteristic


Characteristic		Sym	Minimum	Typical	Maximum	Units
Center Frequency (+25°C)	Absolute Frequency	f _c	433.845	433.92	433.995	MHz
	Tolerance from 315.00 MHz	Δf _c		± 75		kHz
Insertion Loss		IL		1.5		dB
Quality Factor	Unloaded Q	Q _U		11,274		
	50 Ω Loaded Q	Q _L		1,800		
Temperature Stability	Turnover Temperature	T _O	25	40	55	°C
	Turnover Frequency	f _O		f _c		kHz
	Frequency Temperature	FTC		0.037		ppm/°C
Frequency Aging Absolute Value during the First		f _A		≤ 10		ppm/yr
DC Insulation Resistance Between Any Two Pins			1.0			MΩ
RF Equivalent RLC Model	Motional Resistance	R _M		19		Ω
	Motional Inductance	L _M		78.605		μH
	Motional Capacitance	C _M		1.7132		fF
	Pin 1 to Pin 2 Static Capacitance	C _O		1.9		pF

6. Typical Application Circuit

1. Low power transmitter application

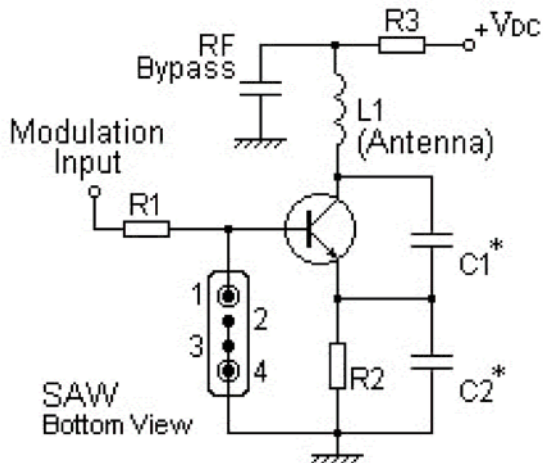

2. Local Oscillator application

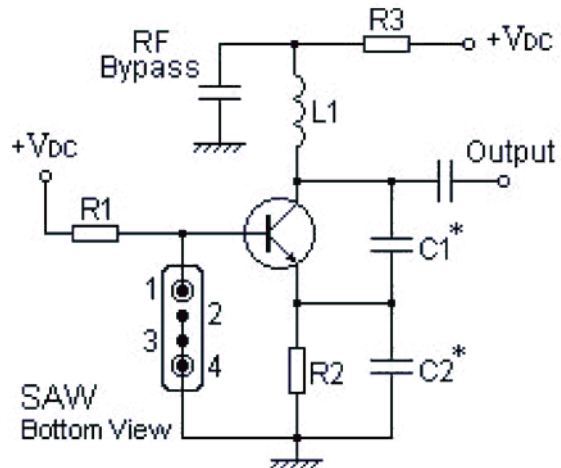

7. REMARKS

1. Frequency aging is the change in f_c with time and is specified at $+65^\circ\text{C}$ or less. Aging may exceed the specification for prolonged temperatures above $+65^\circ\text{C}$. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
2. The center frequency, f_c , is the frequency of minimum IL with the resonator in the specified test fixture in a $50\ \Omega$ test system with $\text{VSWR} \leq 1.2 : 1$. Typically, $f_{\text{oscillator}}$ or $f_{\text{transmitter}}$ is less than the resonator f_c .
3. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
4. Unless noted otherwise, case temperature $T_c = +25^\circ\text{C} \pm 2^\circ\text{C}$.
5. The design, manufacturing process, and specifications of this device are subject to change without notice.
6. Derived mathematically from one or more of the following directly measured parameters: f_c , IL, 3 dB bandwidth, f_c versus T_c , and C_o .
7. Turnover temperature, T_o , is the temperature of maximum (or turnover) frequency, f_o . The

Product Specification	Abundance Enterprise Co.	Original Date	13/7/2007
		PN:	SR433.92-75-F11

nominal center frequency at any case temperature, T_C , may be calculated from $f = f_0 [1 - FTC (T_0 - T_C)^2]$. Typically, oscillator T_0 is 20°C less than the specified resonator T_0 .

8. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C_0 is the measured static (non motional) capacitance between either pin 1 and ground or pin 2 and ground. The measurement includes case parasitic capacitance with a floating case. For usual grounded case applications (with ground connected to either pin 1 or pin 2 and to the case), add approximately 0.25 pF to C_0 .