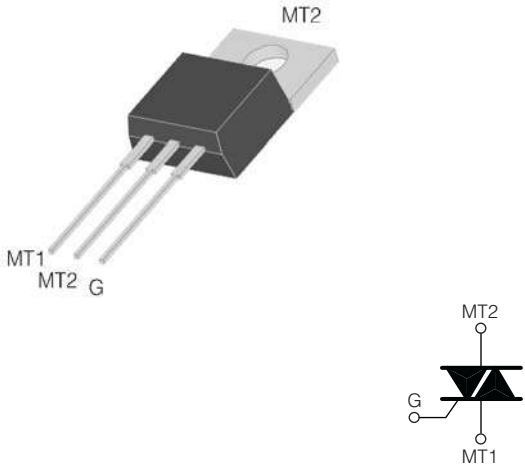


LOGIC LEVEL TRIAC

<p>TO-220A B</p> 	<p>On-State Current 8 Amp</p> <p>Gate Trigger Current < 10 mA</p> <p>Off-State Voltage 200 V ÷ 800 V</p>
<p>This series of TRIACs uses a high performance PNPN technology.</p> <p>These parts are intended for general purpose AC switching applications with highly inductive loads.</p>	

Absolute Maximum Ratings, according to IEC publication No. 134

SYMBOL	PARAMETER	CONDITIONS	Value	Unit
$I_{T(RMS)}$	RMS On-state Current (full sine wave)	All Conduction Angle, $T_C = 95\text{ }^\circ\text{C}$	8	A
I_{TSM}	Non-repetitive On-State Current	Full Cycle, 60 Hz ($t = 16.7\text{ ms}$)	88	A
I_{TSM}	Non-repetitive On-State Current	Full Cycle, 50 Hz ($t = 20\text{ ms}$)	80	A
I^2t	Fusing Current	$t_p = 10\text{ ms}$, Half Cycle	32	A^2s
I_{GM}	Peak Gate Current	$20\text{ }\mu\text{s max.}$ $T_j = 125\text{ }^\circ\text{C}$	4	A
$P_{G(AV)}$	Average Gate Power Dissipation	$T_j = 125\text{ }^\circ\text{C}$	1	W
di/dt	Critical rate of rise of on-state current	$I_G = 2x I_{GT}$, $t_r \leq 100\text{ ns}$ $f = 120\text{ Hz}$, $T_j = 125\text{ }^\circ\text{C}$	50	$A/\mu\text{s}$
T_j	Operating Temperature		$(-40 + 125)$	$^\circ\text{C}$
T_{stg}	Storage Temperature		$(-40 + 150)$	$^\circ\text{C}$
T_{sld}	Soldering Temperature	10s max	260	$^\circ\text{C}$


SYMBOL	PARAMETER	VOLTAGE					Unit
		B	D	M	S	N	
V_{DRM}	Repetitive Peak Off State Voltage	200	400	600	700	800	V
V_{RRM}							

LOGIC LEVEL TRIAC
Electrical Characteristics

SYMBOL	PARAMETER	CONDITIONS	Quadrant		SENSITIVITY					Unit
					03	04	07	08	09	
I _{GT} ⁽¹⁾	Gate Trigger Current	V _D = 12 V _{DC} , R _L = 33Ω, T _j = 25 °C	Q1÷Q3	MAX	3	5	5	10	10	mA
			Q4	MAX	5		7		10	mA
V _{GT}	Gate Trigger Voltage	V _D = 12 V _{DC} , R _L = 33Ω, T _j = 25 °C	Q1÷Q3	MAX	1.3					V
			Q1÷Q4	MAX	1.3					V
V _{GD}	Gate Non Trigger Voltage	V _D = V _{DRM} , R _L = 3.3 KΩ, T _j = 125 °C	Q1÷Q3	MIN	0.2					V
			Q1÷Q4	MIN	0.2					V
I _H ⁽²⁾	Holding Current	I _T = 100 mA, Gate open, T _j = 25 °C		MAX	7	15	15	15	20	mA
I _L	Latching Current	I _G = 1.2 I _{GT} , T _j = 25 °C	Q1,Q3	MAX		25		25		mA
			Q1,Q3,Q4	MAX	7		20		20	mA
			Q2	MAX	20	30	30	30	25	mA
dV/dt ⁽²⁾	Critical Rate of Voltage Rise	V _D = 0.67 x V _{DRM} , Gate open T _j = 125 °C		MIN	10	40	20	40	50	V/μs
(dI/dt) ⁽²⁾	Critical Rate of Current Rise	(dv/dt) _c = 0.1 V/μs T _j = 125 °C (dv/dt) _c = 10 V/μs T _j = 125 °C without snubber T _j = 125 °C		MIN	1.2	5.4	3.5	5.4	2.5	A/ms
				MIN	0.6	2.8	1.5	2.8	1.5	A/ms
				MIN						
V _{TM} ⁽²⁾	On-state Voltage	I _T = 11 Amp, t _p = 380 μs, T _j = 25 °C		MAX	1.6					V
V _{t(o)} ⁽²⁾	Threshold Voltage	T _j = 125 °C		MAX	0.85					V
r _d ⁽²⁾	Dynamic resistance	T _j = 125 °C		MAX	50					mΩ
I _{DRM} /I _{RRM}	Off-State Leakage Current	V _D = V _{DRM} , T _j = 125 °C		MAX	1					mA
		V _R = V _{RRM} , T _j = 25 °C		MAX	5					μA
R _{th(j-c)}	Thermal Resistance Junction-Case	for AC 360° conduction angle			1.6					°C/W
R _{th(j-a)}	Thermal Resistance Junction-Ambient	S = 1 cm ²			60					°C/W

(1) Minimum I_{GT} is guaranteed at 5% of I_{GT} max.

(2) For either polarity of electrode MT2 voltage with reference to electrode MT1.

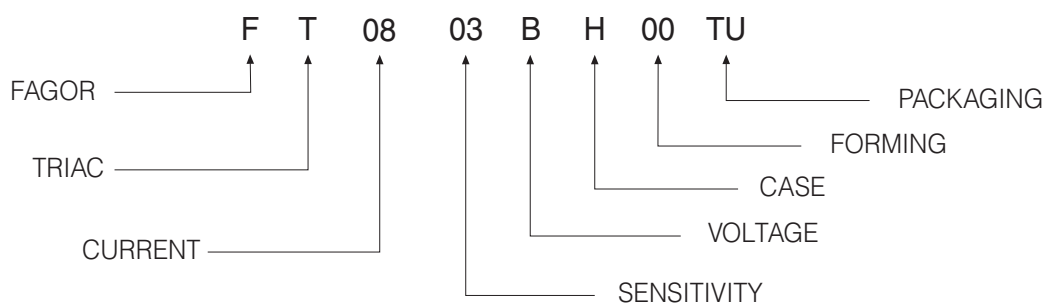PART NUMBER INFORMATION


LOGIC LEVEL TRIAC

Fig. 1: Maximum power dissipation versus RMS on-state current (full cycle).

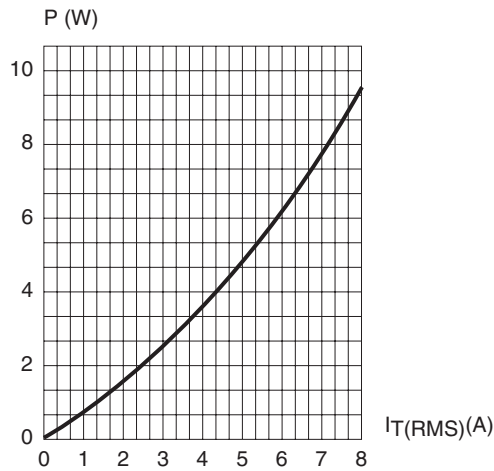


Fig. 2: RMS on-state current versus case temperature (full cycle).

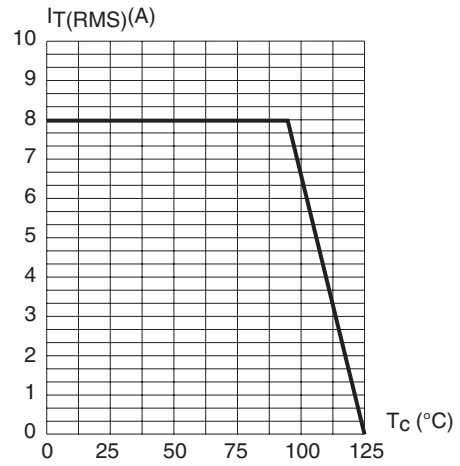


Fig. 3: Relative variation of thermal impedance versus pulse duration.

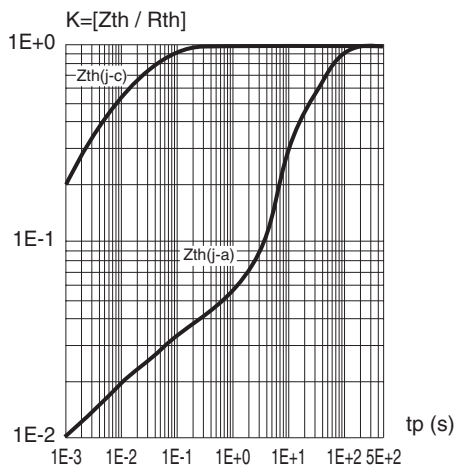


Fig. 4: On-state characteristics (maximum values)

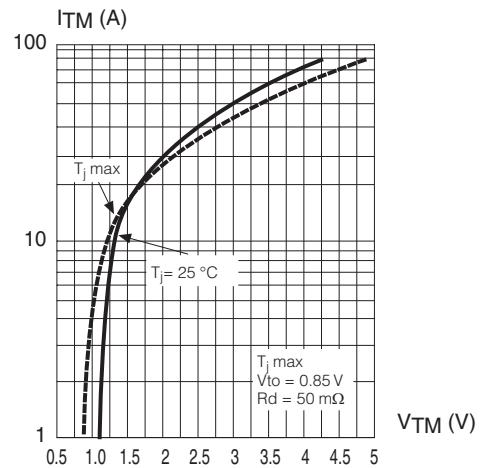


Fig. 5: Surge peak on-state current versus number of cycles


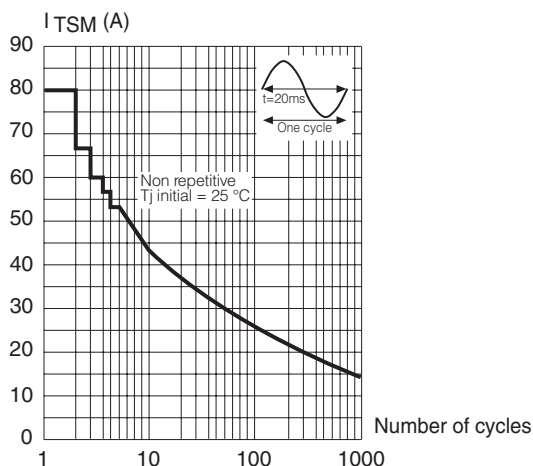


Fig. 6: Non repetitive surge peak on-state current for a sinusoidal pulse with width: $t_p < 10\text{ ms}$, and corresponding value of I^2t .

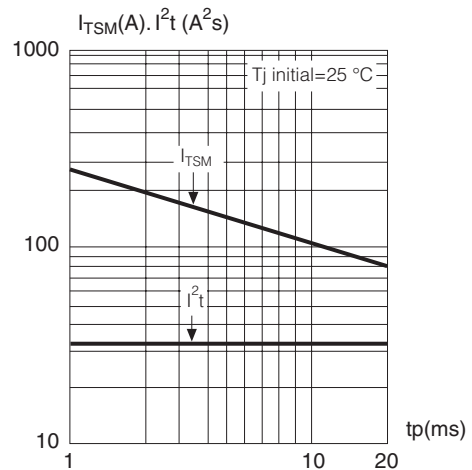

LOGIC LEVEL TRIAC

Fig. 7: Relative variation of gate trigger current, holding current and latching versus junction temperature (typical values)

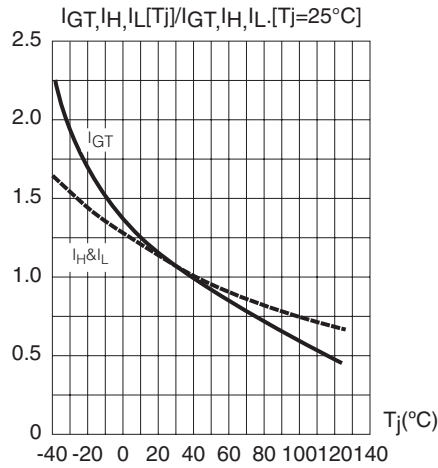


Fig. 8: Relative variation of critical rate of decrease of main current versus junction temperature



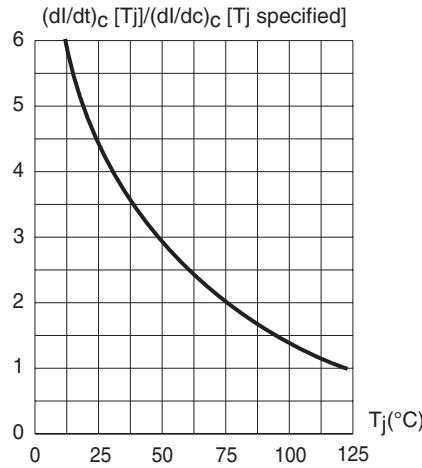


Fig. 9: Relative variation of critical rate of decrease of main current versus

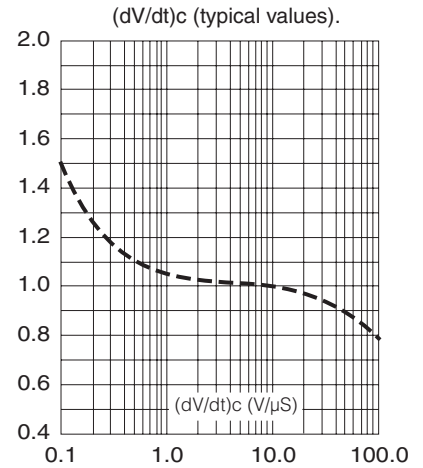

PACKAGE MECHANICAL DATA

TO-220AB

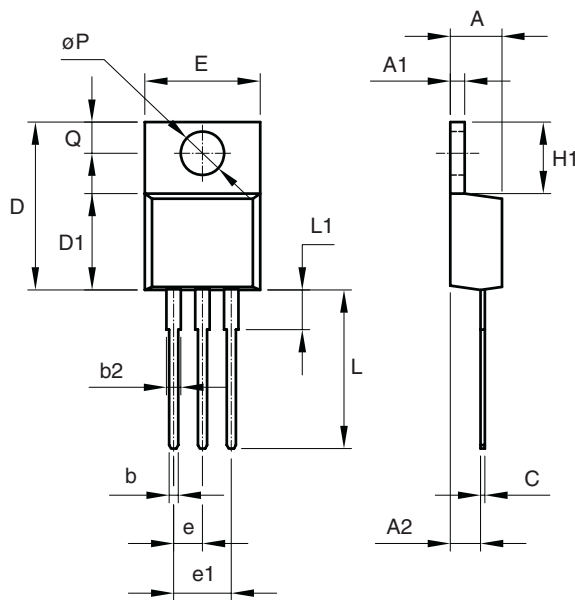

REF.	DIMENSIONS	
	Millimeters	
	Min.	Max.
A	4.47	4.67
A1	1.17	1.37
A2	2.52	2.82
b	0.71	0.91
b2	1.17	1.37
c	0.31	0.53
D	14.65	15.35
D1	8.50	8.90
E	10.01	10.36
e	2.51	2.57
e1	4.98	5.18
H1	6.15	6.45
L	13.40	13.96
L1	3.56	3.96
P	3.735	3.935
Q	2.59	2.89

Mounting Torque

1 N.m

(*) Limiting values and life support applications, see Web page.