



|                      |              |                    |
|----------------------|--------------|--------------------|
| <b>APPROVAL</b>      | CE           |                    |
| <b>Electrical</b>    | <b>UL</b>    | <b>IEC</b>         |
| Standard             | 300V         | 400V               |
| Rated voltage        | 10A          | 16A                |
| Rated current        | 22-16AWG     | 1.5mm <sup>2</sup> |
| Wire range           | AC2500V/1Min |                    |
| Withstanding voltage |              |                    |

|                     |                  |  |
|---------------------|------------------|--|
| <b>Menchanical</b>  |                  |  |
| Torque              | 0.5Nm(4.5Lb-In.) |  |
| Ambient temperature | -40°C~T105 °C    |  |
| Strip length        | 7-8mm            |  |
| <b>Dimensions</b>   |                  |  |
| pitch               | 11.5mm(.453" )   |  |
| Poles               | 3P               |  |

|                 |                                      |  |
|-----------------|--------------------------------------|--|
| <b>Material</b> |                                      |  |
| Housing         | PA66,UL94V-2                         |  |
| Screws          | M3,Steel, Cr <sup>3+</sup> Zn-plated |  |
| Current carrier | Brass,Ni-plated                      |  |

### HOW TO ORDER :

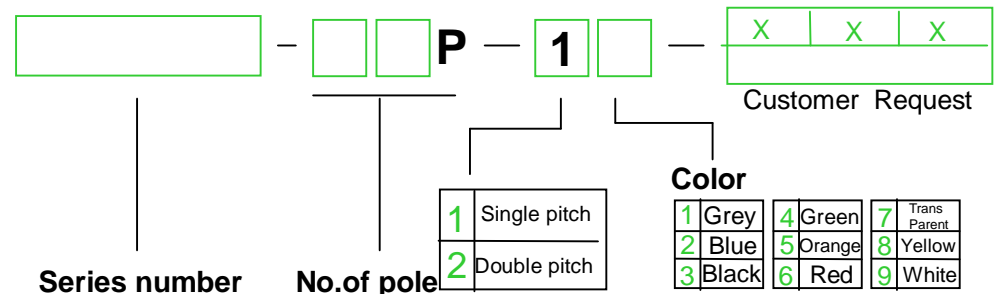

|                      |   |
|----------------------|---|
| mm<br>(INCH)         |  <b>DEGSON ELECTRONICS CO., LTD.</b> |
| THROANGLE PROJECTION | <b>NAME</b> DG285   |