

**FEATURES:**



- RoHS compliant
- 12 Pin SIP Package
- Low ripple and noise
- High efficiency up to 70%
- Operating temperature -40°C to + 85°C
- Input / Output Isolation 1000, 3000 or 5200VDC
- Pin compatible with multiple manufacturers

**Models**

**Single output**

**Input/Output Isolation 1000VDC**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Capacitive load, max (µF)	Efficiency (%)
AM2F-0503SZ	4.5-5.5	3.3	600	470	64
AM2F-0505SZ	4.5-5.5	5	400	470	66
AM2F-0507SZ	4.5-5.5	7.2	278	470	64
AM2F-0509SZ	4.5-5.5	9	222	470	66
AM2F-0512SZ	4.5-5.5	12	167	470	70
AM2F-0515SZ	4.5-5.5	15	134	470	70
AM2F-0518SZ	4.5-5.5	18	111	470	67
AM2F-0524SZ	4.5-5.5	24	83	470	68
AM2F-1203SZ	10.8-13.2	3.3	600	470	64
AM2F-1205SZ	10.8-13.2	5	400	470	66
AM2F-1207SZ	10.8-13.2	7.2	278	470	63
AM2F-1209SZ	10.8-13.2	9	222	470	66
AM2F-1212SZ	10.8-13.2	12	167	470	70
AM2F-1215SZ	10.8-13.2	15	134	470	70
AM2F-1218SZ	10.8-13.2	18	111	470	66
AM2F-1224SZ	10.8-13.2	24	83	470	68
AM2F-2403SZ	21.6-26.4	3.3	600	470	54
AM2F-2405SZ	21.6-26.4	5	400	470	64
AM2F-2407SZ	21.6-26.4	7.2	278	470	63
AM2F-2409SZ	21.6-26.4	9	222	470	64
AM2F-2412SZ	21.6-26.4	12	167	470	68
AM2F-2415SZ	21.6-26.4	15	134	470	68
AM2F-2418SZ	21.6-26.4	18	111	470	68
AM2F-2424SZ	21.6-26.4	24	83	470	70

**Input/Output Isolation 3000VDC**

AM2F-0503SH30Z	4.5-5.5	3.3	600	470	64
AM2F-0505SH30Z	4.5-5.5	5	400	470	66
AM2F-0507SH30Z	4.5-5.5	7.2	278	470	64
AM2F-0509SH30Z	4.5-5.5	9	222	470	66
AM2F-0512SH30Z	4.5-5.5	12	167	470	70
AM2F-0515SH30Z	4.5-5.5	15	134	470	70
AM2F-0518SH30Z	4.5-5.5	18	111	470	67
AM2F-0524SH30Z	4.5-5.5	24	83	470	68
AM2F-1203SH30Z	10.8-13.2	3.3	600	470	64
AM2F-1205SH30Z	10.8-13.2	5	400	470	66
AM2F-1207SH30Z	10.8-13.2	7.2	278	470	63
AM2F-1209SH30Z	10.8-13.2	9	222	470	66
AM2F-1212SH30Z	10.8-13.2	12	167	470	70
AM2F-1215SH30Z	10.8-13.2	15	134	470	70
AM2F-1218SH30Z	10.8-13.2	18	111	470	66
AM2F-1224SH52Z	10.8-13.2	24	83	470	68
AM2F-2403SH30Z	21.6-26.4	3.3	600	470	64
AM2F-2405SH30Z	21.6-26.4	5	400	470	64

**Models**

**Single output (continued)**

**Input/Output Isolation 3000VDC**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (A)	Capacitive load, max (μF)	Efficiency (%)
AM2F-2407SH30Z	21.6-26.4	7.2	278	470	63
AM2F-2409SH30Z	21.6-26.4	9	222	470	64
AM2F-2412SH30Z	21.6-26.4	12	167	470	68
AM2F-2415SH30Z	21.6-26.4	15	134	470	68
AM2F-2418SH30Z	21.6-26.4	18	111	470	68
AM2F-2424SH30Z	21.6-26.4	24	83	470	70

**Input/Output Isolation 5200VDC**

AM2F-0503SH52Z	4.5-5.5	3.3	600	470	53
AM2F-0505SH52Z	4.5-5.5	5	400	470	66
AM2F-0507SH52Z	4.5-5.5	7.2	278	470	64
AM2F-0509SH52Z	4.5-5.5	9	222	470	66
AM2F-0512SH52Z	4.5-5.5	12	167	470	70
AM2F-0515SH52Z	4.5-5.5	15	134	470	70
AM2F-0518SH52Z	4.5-5.5	18	111	470	67
AM2F-0524SH52Z	4.5-5.5	24	83	470	68
AM2F-1203SH52Z	10.8-13.2	3.3	600	470	53
AM2F-1205SH52Z	10.8-13.2	5	400	470	66
AM2F-1207SH52Z	10.8-13.2	7.2	278	470	63
AM2F-1209SH52Z	10.8-13.2	9	222	470	66
AM2F-1212SH52Z	10.8-13.2	12	167	470	70
AM2F-1215SH52Z	10.8-13.2	15	134	470	70
AM2F-1218SH52Z	10.8-13.2	18	111	470	66
AM2F-1224SH52Z	10.8-13.2	24	83	470	68
AM2F-2403SH52Z	21.6-26.4	3.3	600	470	54
AM2F-2405SH52Z	21.6-26.4	5	400	470	64
AM2F-2407SH52Z	21.6-26.4	7.2	278	470	63
AM2F-2409SH52Z	21.6-26.4	9	222	470	64
AM2F-2412SH52Z	21.6-26.4	12	167	470	68
AM2F-2415SH52Z	21.6-26.4	15	134	470	68
AM2F-2418SH52Z	21.6-26.4	18	111	470	68
AM2F-2424SH52Z	21.6-26.4	24	83	470	70

**Input Specifications**

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5 12 24	4.5-5.5 10.8-13.2 21.6-25.4		VDC
Filter	Capacitor			
Turn on Transient process time			100	ms
Start up time		300		ms
Absolute Maximum Rating	5 Vin 12 Vin 24 Vin	0-7 0-15 0-28		VDC
Peak Input Voltage time		100		ms

**Isolation Specifications**

Parameters	Conditions	Typical	Maximum	Units
Tested voltage	3 sec	1000, 3000 or 5200		VDC
Resistance		> 1000		MOhm
Capacitance		60		pF

### Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±2		%
Short Circuit protection	Continuous			
Short Circuit restart	Automatic			
Line voltage regulation (Single)		±0.5		%
Load voltage regulation (Single)	Load 0 – 100%	±0.5		%
Load voltage regulation (Single) 3.3V output model	Load 0 – 100%	±1.5		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise		75		mV p-p
Rising time		150		ms


### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	50		KHz
Operating temperature	Full Load without Derating	-40 to +85		°C
Storage temperature		-40 to +125		°C
Case temperature			90	°C
Cooling		Free air convection		%
Humidity	Non - condensing		90	%
Case material		Plastic UL94-VO		
Weight		3.8		g
Dimensions		1.25 x 0.34 x 0.53 inches	31.8 x 8.6 x 13.47 mm	
MTBF		>1 500 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)		

### Pin Out Specifications

Pin	1000VDC	3000 and 5200VDC
1	+V Input	+V Input
2	N.C.	-V Input
3	N.C.	N.C.
9	N.C.	N.C.
10	-V Output	-V Output
11	+V Output	+V Output
12	-V Input	N.C.

### Dimensions

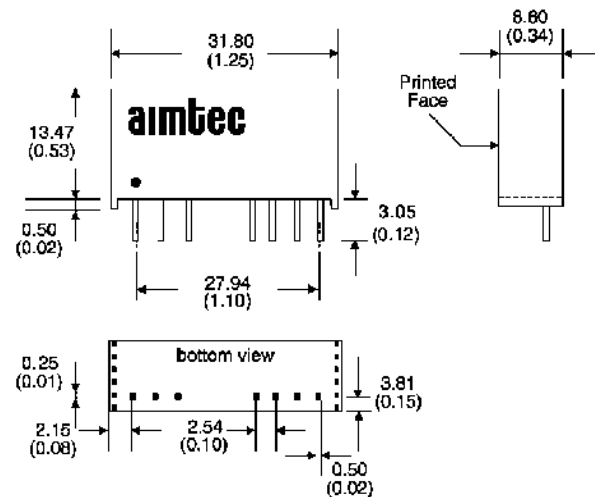

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 5. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet.