

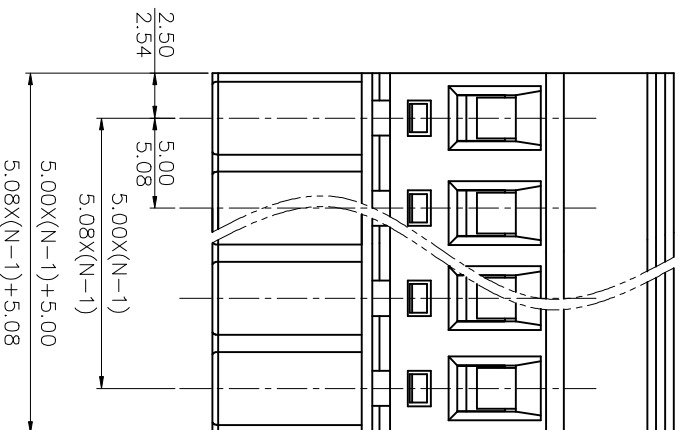
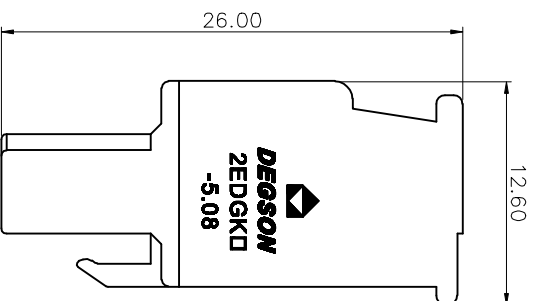
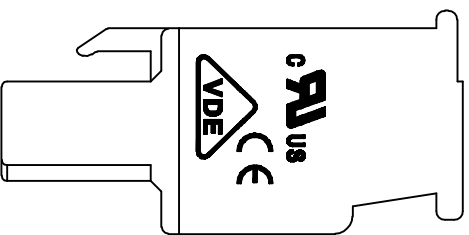


REV	ECON	DESCRIPTION	DRFT	DATE
-----	------	-------------	------	------

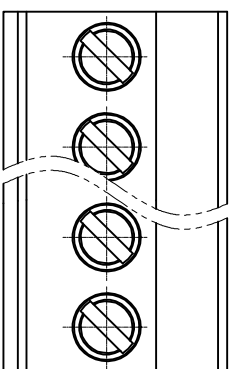

02P: Clasp on the left from this view

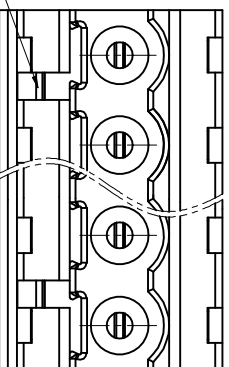

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 15A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M2.5 , 3.54Lb.in
4. Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	18A


2. Torque value : M2.5 , 0.4N•m
3. Wire range : 2.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.0/5.08mm, Poles : N=02~24P
3. Stripping length : 7~8mm
4. Operating temperature : -40°C~+105°C
5. Undimensioned tolerances:

Pitch mm	range	In		Nominal dimension range		In	mm	Nominal dimension range	±	%	
		Over	To	Over	To						Over
6	10	10	10	30	60	100	150	0.1/1.0			
6	10	10	10	30	60	100	150	<			
6	10	24	30	60	100	150					
		±0.15		±0.20		±0.30		±0.50		±1.00	

6. RoHS Compliance

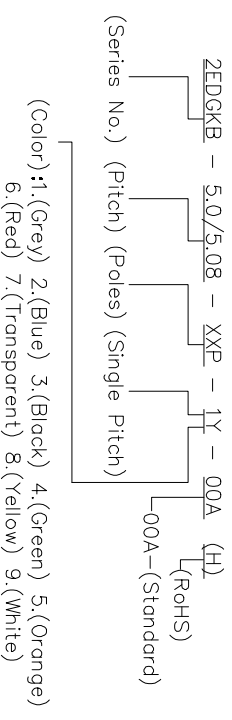

PART NO.: /				NINGBO DEGSON ELECTRICAL CO., LTD 宁波德森电子有限公司	
NAME: ZEDGKB-5.0/5.08-XXP-1Y-00A(H)				DRAWING NO.: /	
APPD: /	CHKD: /	DRFT: /	TITLE: CUSTOMER DRAWING	REV: DO	SHEET: 1/1
THIRD ANGLE PROJECTION				SCALE: 1:1	DO NOT SCALE DRAWING