

Features

- ◆ Ultra wide Input Voltage Range
- ◆ Output Voltage adjustable
- ◆ Overload and Short Circuit Protection
- ◆ Low Ripple and Noise
- ◆ I/O – Isolation 1500 VDC
- ◆ Compact, slim Plastic Case
- ◆ Reliable Snap-on Mounting on DIN-Rails
- ◆ Bracket for Wall Mounting included
- ◆ 3 Year Product Warranty



In the TCL range of DIN-rail power supplies are also 4 models available with DC-input voltage. The wide input ranges of 9.5-18 VDC resp. 18-75 VDC allows to operate these models from all popular DC- supply voltage systems. With tightly regulated output voltage these DC/DC converters provide a reliable power source for sensitive loads in industrial process controls, factory automation and other equipment exposed to a critical industrial environment. A further application for these converters is to isolate a specific load from the 24V bus voltage. A further application for these converters is to isolate a specific load from the 24V bus voltage. Easy installation is provided with snap-on mounting on the DIN-rail and detachable screw terminal block.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TCL 012-124 DC	9.5 – 18.0 VDC	24 VDC	1.0A	t.b.a.
TCL 024-105 DC	18 – 75 VDC	5 VDC	5.0A	t.b.a.
TCL 024-112 DC		12 VDC	2.0A	t.b.a.
TCL 024-124 DC		24 VDC	1.0A	87 %

Input Specifications

Input power at no load		1.0 Watt max.
Start-up voltage / under voltage shut down	TCL 012 model: TCL 024 models:	8.4 VDC / 7.6 VDC 17.2 VDC / 15.7 VDC
Revers polarity protection		by internal fuse
Surge immunity		EN 61000-4-5, Level 3
Burst immunity		EN 61000-4-4, Level 4
Conducted noise (input)		EN 55011 class B, EN 55022 class B

Output Specifications



Output voltage adj. range	12 VDC model: 24 VDC model:	12.0...15.0 VDC 24.0...28.0 VDC
Regulation	– Input variation $V_{in \text{ min.}}$ to $V_{in \text{ max.}}$ – Load variation 0...100%	$\pm 0.5\%$ max $\pm 0.5\%$ max
Ripple and Noise (20MHz Bandwidth)		< 50 mV pk-pk
Electronic short circuit protection		current limitation at 110 % typ. (constant current, automatic recovery)
Overvoltage protection, triggerpoint	12 VDC model: 24 VDC model:	< 24 VDC < 42 VDC

General Specifications


Temperature ranges	– Operating – Storage (non operating)	– 10 °C...+70 °C max. – 25 °C...+85 °C
Temperature derating		1.5% /K above 50°C
Humidity (non condensing)		95 % rel. H max.
Temperature coefficient		0.02 % /K
Switching frequency		55 – 180 kHz depending on load (frequency modulation)
Isolation voltage (1 min.)	– Input / Output	1500 VDC
Reliability, calculated MTBF @ 25°C (according to IEC-1709)		>2.5 Mio h
Safety standards		IEC 60950, EN 60950 (output SELV), UL/cUL 60950, EN 60204
Safety approvals (pending)		UL/cUL 60950 recognized CB-report per IEC 60950
Electromagnetic compatibility (EMC), Emissions		EN 61000-6-3
Electromagnetic compatibility (EMC), Immunity		EN 61000-6-2
Safety class		degree of protection class 1
Case protection		IP 20 (IEC 60529)
Enclosure material		plastic FR2010-110C (UL 94V-0 rated)
Mounting		35 mm DIN-rails as per EN 50022-35x15/7.5 (snap-on with self-locking spring) bracket for wall-/chassis mounting included

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions mm (inches)

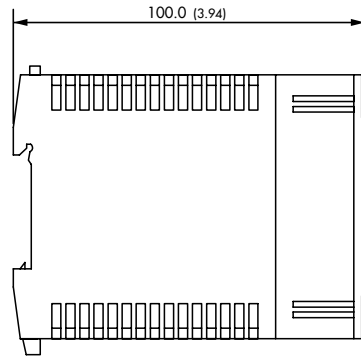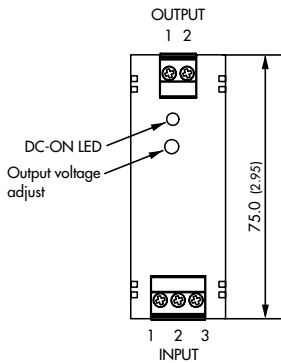


Output	Input
1 + Vout	1 Protective earth
2 - Vout	2 -Vin
	3 +Vin

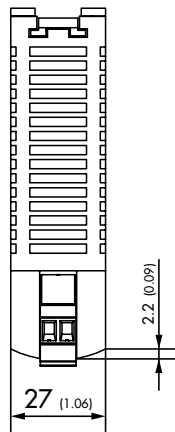

Weight: 140g (4.9 oz)

Tolerances: $\pm 0.5\text{mm}$ (± 0.02)

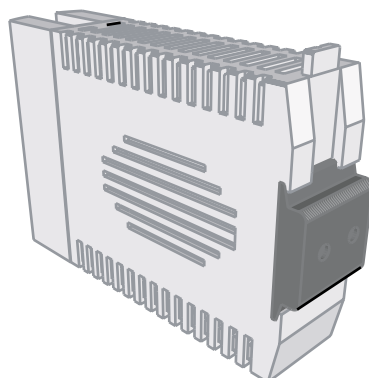

Wall Mounting

Instead on a DIN-rail, the module can be easily mounted on a chassis or wall with help of a mounting bracket which is supplied as standard with the DC/DC-Converter.

Specifications can be changed without notice