

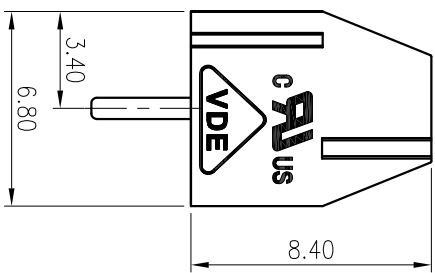

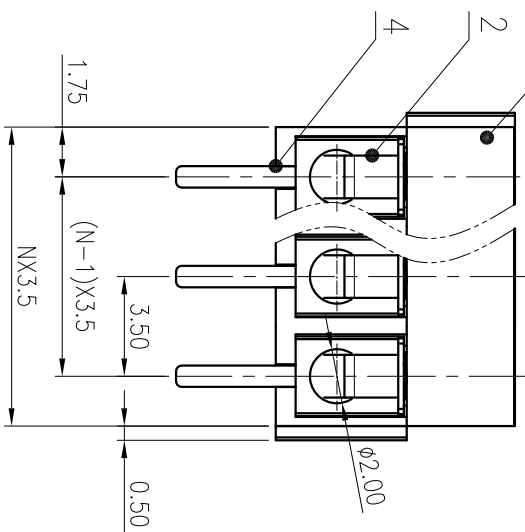


公差/General tolerance(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
3	~	~	~	~	~	~	~	~	~	~	~	~	±
±0.12	±0.18	±0.22	±0.28	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

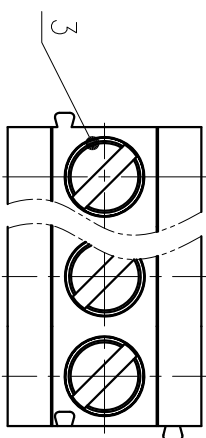

PCB LAYOUT

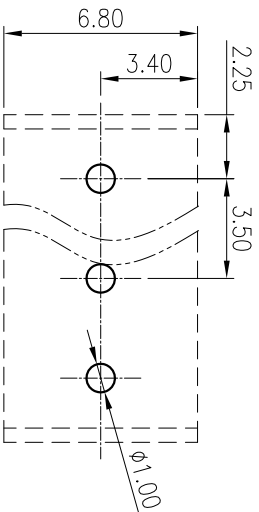

MATERIAL:		SURFACE:	
MAT NO.:	/		
STATUS:	/		
App:Lon	CHH 2020.05.20	NAME: DEGSON 宁波高松电子有限公司	
CHKD:Yu	JZh 2020.05.20	NINGBO DEGSON ELECTRICAL CO., LTD	
DRT: Song	2015.12.11	DRAWING NO.: DG350-3.5-C01	
SIZE:A4	mm (inch)	TYPE: CUSTOMER DRAWING	
		SCALE: 4:1	REV T1
		SHEET	1/1

4	Pin header	Copper alloy	M2/Sn plated
3	Screw	Steel	M2/Zn plated
2	Spring	Stainless steel	/
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/Rated Voltage(V)/Current(A) 300/7 / 300/7			
IEC 标准/IEC Standard: B C D			
过压类别/Overvoltage Category/污染等 III/3 III/2 II/2			
级/ Pollution Degree / 130/10 /			
额定电压/电涌/Rated Voltage(V)/Current(A) / AC1250			
工频耐压/Withstanding voltage(V/1Min) M2. 0.20/1.77			
螺丝扭矩/Torque Tightening(N·m/Lb·in) 0.5~1.0/24~18			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG) 3.5/N=02~24P			
间距/Pitch(mm)/线数范围/Poles -40~+105			
剥线长度/Stripping length(mm) 5			
使用温度范围/Operating temperature(°C) Yes			
符合RoHS环保要求/Conform to RoHS			

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				