


LOW COST SOCKETS

ID: 052

MLC-A ECONOMY LINE LOW COST


Series 150



TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	1 Amp.
Rated Voltage	100 V _{RMS} /150 V _{DC}
Breakdown Voltage	min. 1000 V _{RMS}
Operating Temperature	-40°C bis +105°C
Maximum Soldering Temperature	230°C for 5 seconds

3 | 2,54 mm

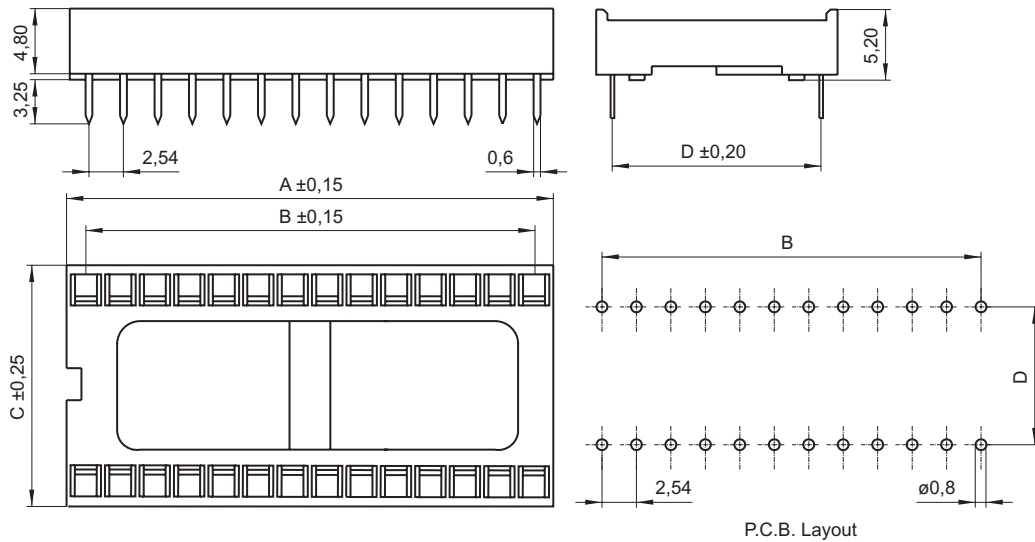

All dimensions in mm.
Other dimensions upon request.

Code	Poles	A	B	C	D
06.3	6	7,62	5,08	10,16	7,62
08.3	8	10,16	7,62	10,16	7,62
14.3	14	17,78	15,24	10,16	7,62
16.3	16	20,32	17,78	10,16	7,62
18.3	18	22,86	20,32	10,16	7,62
20.3	20	25,40	22,86	10,16	7,62
24.3	24	30,48	27,94	10,16	7,62
28.3	28	35,56	33,02	10,16	7,62
22.4	22	27,94	25,40	12,70	10,16
24.6	24	30,48	27,94	17,78	15,24
28.6	28	35,56	33,02	17,78	15,24
32.6	32	40,64	38,10	17,78	15,24
40.6	40	50,80	48,26	17,78	15,24
42.6	42	53,34	50,80	17,78	15,24
48.6	48	60,96	58,42	17,78	15,24

MLC-A XX.X L

Code: see table

L: RoHS-compliant with standard plastic

Versions without center bar upon request.